







EN

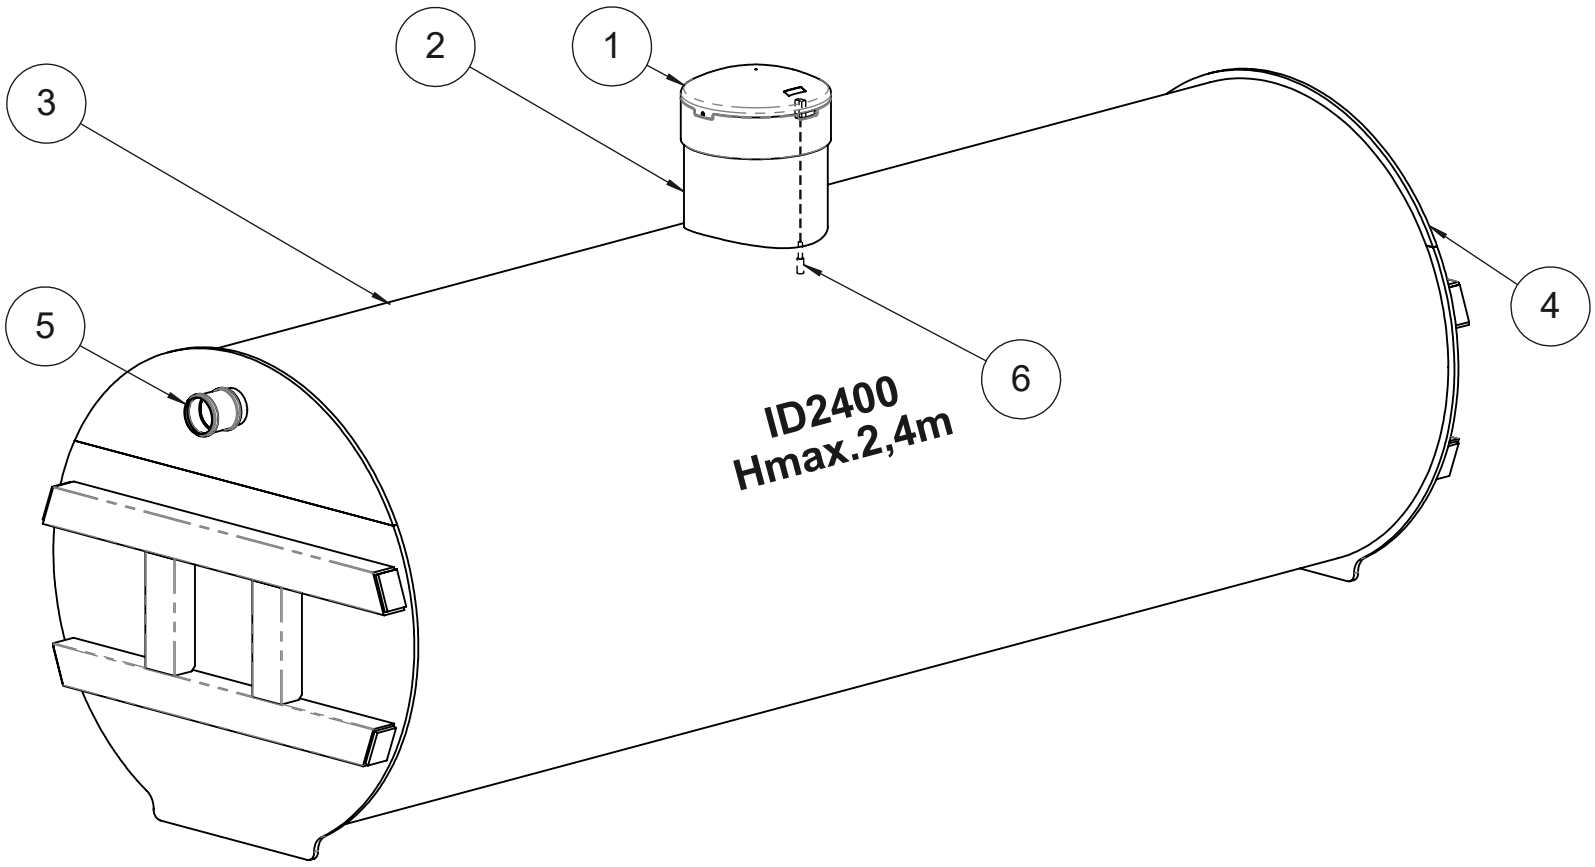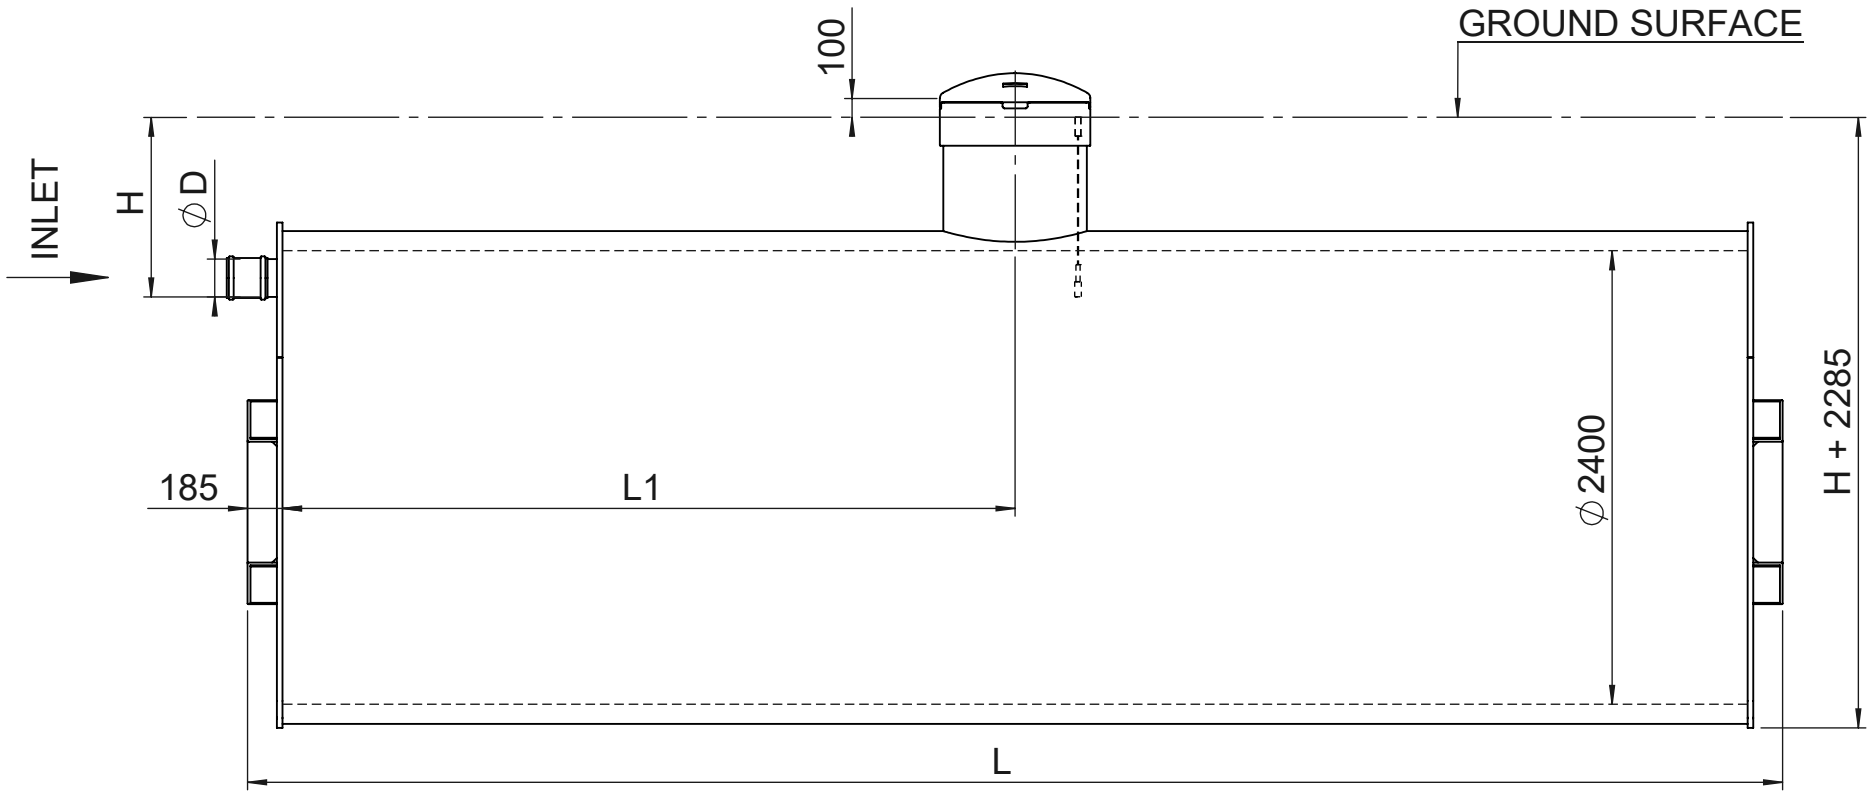



Ø200 cover PVC	A	Ø160 cover Cast iron 40t	B	Ø400 cover PVC	C	Ø315 cover Cast iron 40t	D	Ø760 cover PE	E	Ø630 cover Cast iron 40t	F
											

Volume V (m3)	Length L (mm)	Product code
25	5970	502425
30	7070	502430
35	8170	502435
40	9270	502440
45	10370	502445
50	11470	502450
55	12570	502455
60	13670	502460

Pos.	Description	Material	Size
1	Cover	PVC / PE / Cast iron	according to selection
2	Service opening	PE100	according to selection
3	Tank cylinder, double wall	PE100	ID2400, SN4
4	End cap	PE+Steel	ID2400
5	Inlet coupling	PVC	according to selection
6	Alarm device Tank-Check TC-412	-	optional

Tank volume	V =.....m3
Inlet depth from Ground Surface NB! max2,4m	H =.....mm / standard 950 mm ☐
Inlet diameter	D110 ☐ D160 ☐ D200 ☐ D250 ☐ D315 ☐
Service opening type	A ☐ B ☐ C ☐ D ☐ E ☐ F ☐
Service opening location	L1 =.....mm / middle ☐
Alarm device	☐ YES / NO ☐

Drawn:	A.Käärid	Underground tank ID2400 STRONG Hmax.2,4m		
Approved:	J.Karolin			
www.iwsgroup.ee Innovative Water Systems		Mass: kg NA	Product code: 5024 ... ... / ordersheet	Rev. 1

This document and its contents are the property of Innovative Water Systems LLC and must not be copied, reproduced or disclosed to any third party without prior written permission. Contravention will be prosecuted.