



Pos.	Description	Material, Type	Size
1	Cover	PE / Cast iron	according to selection
2	Handrail, telescopic	AISI316	220x925
3	Service opening	PE	according to selection
4	Ladder, non slippery steps	AISI316	300x345
5	Air release valve	Steel	according to selection
6	Tank cylinder, double wall	PE100	ID1600, SN4
7	Gate valve AVK	Ductile iron	according to selection
8	Pressure pipe	PE100	according to selection
9	Bottom, steel reinforced	PE100 - Steel	100 mm
10	Anchor bolt W-FA	AISI316	M20x150, 12 pcs
11	Concrete plate, reinforced	Concrete	200x2400x2400
12	Backing rings	PP-Steel	according to selection
13	Bolts, nuts, washers	AISI316	M16

Ø795 cover PE (insulated)

A

Ø630 cover cast iron 40t

B

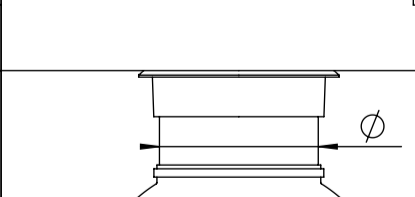
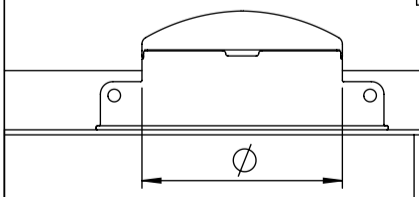


755x1155 cover PE(insulated)

C

600x1200 cover cast-iron 40t
600x1155 free opening

D

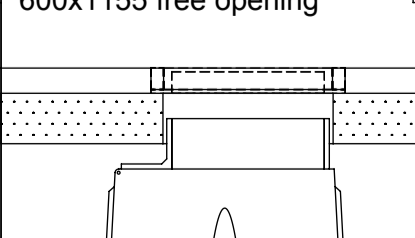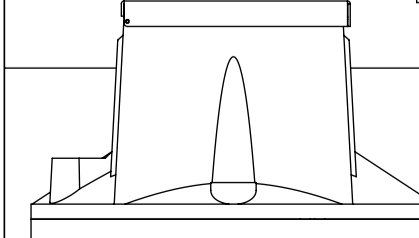

Service opening type	A	B	C	D
Handrail, telescopic (not available for type "B")	YES / NO			
Pressure pipe depth from Ground Surface	H = mm			
Pressure pipe diameter	D = mm			
Air release valve type / material	Potable water		Sewage	
Air release valve connection	DN50	DN80	DN100	DN150 DN200

Drawn:	A.Käärid	Air release well ID1600 STRONG
Approved:	J.Karolin	

www.iwsgroup.ee	Mass: kg	Product code:	Rev.
Innovative Water Systems	NA	505220 / ordersheet	0